

# Monthly Noise Monitoring Assessment

Tomingley Gold Mine, May 2020



# Document Information

## Monthly Noise Monitoring Assessment

### Tomingley Gold Mine, May 2020

Prepared for: Tomingley Gold Operations Pty Limited



**Prepared by:** Muller Acoustic Consulting Pty Ltd

PO Box 262, Newcastle NSW 2300

ABN: 36 602 225 132

P: +61 2 4920 1833

[www.mulleracoustic.com](http://www.mulleracoustic.com)

Document ID	Status	Date	Prepared By	Signed	Reviewed By	Signed
MAC160270RP43	Final	2 June 2020	Nicholas Shipman		Oliver Muller	

#### DISCLAIMER

All documents produced by Muller Acoustic Consulting Pty Ltd (MAC) are prepared for a particular client's requirements and are based on a specific scope, circumstances and limitations derived between MAC and the client. Information and/or report(s) prepared by MAC may not be suitable for uses other than the original intended objective. No parties other than the client should use or reproduce any information and/or report(s) without obtaining permission from MAC. Any information and/or documents prepared by MAC is not to be reproduced, presented or reviewed except in full.

**CONTENTS**

1 INTRODUCTION .....5

2 ENVIRONMENTAL PROTECTION LICENSE NOISE LIMITS.....7

3 METHODOLOGY .....9

    3.1 LOCALITY .....9

    3.2 ASSESSMENT METHODOLOGY .....9

4 RESULTS ..... 11

    4.1 ASSESSMENT RESULTS - LOCATION R2..... 11

    4.2 ASSESSMENT RESULTS - LOCATION R3/R29 ..... 12

    4.3 ASSESSMENT RESULTS - LOCATION R4..... 13

    4.4 ASSESSMENT RESULTS - LOCATION R5..... 14

    4.5 ASSESSMENT RESULTS - LOCATION R6..... 15

    4.6 ASSESSMENT RESULTS - LOCATION R23..... 16

5 DISCUSSION ..... 17

    5.1 DISCUSSION OF RESULTS - LOCATION R2 ..... 17

    5.2 DISCUSSION OF RESULTS - LOCATION R3/R29..... 17

    5.3 DISCUSSION OF RESULTS - LOCATION R4 ..... 17

    5.4 DISCUSSION OF RESULTS - LOCATION R5 ..... 17

    5.5 DISCUSSION OF RESULTS - LOCATION R6 ..... 17

    5.6 DISCUSSION OF RESULTS - LOCATION R23 ..... 18

6 COMPARISON OF ATTENDED AND UNATTENDED MONITORING RESULTS ..... 19

7 CONCLUSION ..... 21

APPENDIX A - GLOSSARY OF TERMS

*This page has been intentionally left blank*

# 1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Tomingley Gold Operations Pty Ltd (TGO) to complete a Noise Monitoring Assessment (NMA) for Tomingley Gold Mine ('the mine'), Tomingley, NSW.

The NMA involved quantifying the noise contribution of the mine by direct attended measurements to determine mining noise emissions so that effective management and controls can be implemented where required. The monitoring has been conducted in accordance with the TGO Noise Management Plan and in general accordance with Conditions L4.2 to L4.7 of the EPL at six representative receiver locations. It is noted that this assessment has been completed as part of an internal noise management initiative and does not form part of the annual noise monitoring program to address conditions of the Environmental Protection License (EPL).

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI) 2017;
- Environment Protection Licence EPL 20169 (EPL); and
- Australian Standard AS 1055:2018 - Acoustics - Description and measurement of environmental noise - General Procedures.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

*This page has been intentionally left blank*

## 2 Environmental Protection License Noise Limits

Historic assessments for the mine categorise receivers into Noise Assessment Groups (NAGs). The NAGs were derived based on ambient noise data that controlled receiver RBLs.

**Table 1** reproduces the operational and sleep disturbance noise limits for assessed receivers referenced from the EPL that have been adopted for this NMA and are consistent with historic EPL monitoring locations.

Table 1 Noise Limits, dBA					
Noise Assessment Group	Receivers	Day	Evening	Night	
		LAeq(15min)	LAeq(15min)	LAeq(15min)	LA1(1min)
NAG A	R4, R5, R6	35	35	35	45
NAG B	R2	36	35	35	45
NAG C	R3, R29	45	35	35	45
NAG D	R23	43	38	36	46

Note: Refer to figure in Appendix 4 of Project Approval 09-0155 for noise locations. However, these criteria do not apply if the Proponent has an agreement with the relevant owner(s) of these residences / land to generate higher noise levels, and the Proponent has advised the Department of Planning and Infrastructure and EPA in writing of the terms of this agreement.

*This page has been intentionally left blank*



### 3 Methodology

#### 3.1 Locality

TGO is located to the south of the village of Tomingley, NSW. Receivers in the locality surrounding the mine are primarily rural/residential and for consistency the naming conventions for each receiver have been retained from historic noise assessments. The monitoring locations with respect to the mine are presented in the locality plan shown in **Figure 1**.

#### 3.2 Assessment Methodology

The attended noise survey was conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise" and the EPL. Measurements were carried out using Svantek Type 1, 971 noise analyser between Tuesday 19 May 2020 and Thursday 21 May 2020. The acoustic instrumentation used carries current NATA calibration and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed  $\pm 0.5$  dBA.

Both evening and night measurements were of 15 minutes duration. Where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to calculate the  $L_{Aeq}(15min)$  mine noise contribution for comparison against the relevant EPL limit.

Prevailing meteorological conditions for the monitoring period were sourced from TGO's meteorological station and analysed in accordance with Appendix E4 of the NPI to determine the stability category present at the time of each measured sample. This was undertaken to determine applicability of results in accordance with Condition L4.3 of the EPL. Results obtained during non-prevailing meteorological conditions (ie F Class Stability in conjunction with a 2m/s drainage or G Class Stability) are considered not applicable against the EPL criteria.

KEY



MINE SITE BOUNDARY



ASSESSED RECEPTORS



BROOKLANDS UNATTENDED



FIGURE 1 - LOCALITY PLAN AND ASSESSMENT LOCATIONS

TOMINGLEY GOLD MINE EPL NOISE MONITORING

REF: MAC160270



## 4 Results

The monitoring and assessment results are presented in individual tables for each assessment location.

### 4.1 Assessment Results - Location R2

The results of the attended noise measurements at location R2 for the May 2020 survey are summarised in **Table 2** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 2 Operator-Attended Noise Survey Results – Location R2							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	21:39	51	36	31	35	WD: E	Wind 31-51
						WS: 1.5m/s	Traffic 28-36
						Stab Class: E	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
19/05/2020 (Night)	22:00	45	36	33	35	WD: E	Wind 28-45
						WS: 1.5m/s	Traffic 28-34
						Stab Class: D	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Evening)	21:39	54	36	33	35	WD: N	Wind 28-54
						WS: 1.5m/s	Traffic <32
						Stab Class: E	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Night)	22:00	47	36	33	35	WD: N	Wind 30-47
						WS: 2m/s	Traffic <33
						Stab Class: E	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Evening)	21:27	58	34	22	35	WD: W	Wind 18-58
						WS: 0.5m/s	Traffic <28
						Stab Class: D	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Night)	22:00	69	42	24	35	WD: W	Traffic 28-68
						WS: 0.5m/s	Wind 28-42
						Stab Class: E	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

## 4.2 Assessment Results - Location R3/R29

The results of the attended noise measurements at location R3/R29 for the May 2020 survey are summarised in **Table 3** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

**Table 3 Operator-Attended Noise Survey Results – Location R3/R29**

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	20:49	86	66	38	35	WD: NE	Traffic 36-86
						WS: 2m/s	Wind 34-39
							Insects <39
							TGO Inaudible
TGO Site LAeq(15min) Contribution							<35
19/05/2020 (Night)	22:40	87	64	42	35	WD: NE	Traffic 34-87
						WS: 1.5m/s	Wind 26-32
							TGO Inaudible
TGO Site LAeq(15min) Contribution							<35
20/05/2020 (Evening)	20:56	88	66	32	35	WD: N	Traffic 28-85
						WS: 1m/s	Insects <26
							Wind <30
							Dogs 24-34
							TGO Inaudible
TGO Site LAeq(15min) Contribution							<35
20/05/2020 (Night)	22:41	87	67	36	35	WD: N	Traffic 34-86
						WS: 2.5m/s	Wind 34-42
							TGO Inaudible
TGO Site LAeq(15min) Contribution							<35
21/05/2020 (Evening)	20:46	86	67	35	35	WD: W	TGO hauling 28-33
						WS: 0.5m/s	Wind 30-34
							Traffic 32-86
TGO Site LAeq(15min) Contribution							<32
21/05/2020 (Night)	22:38	87	66	35	35	WD: W	Traffic 32-87
						WS: 0.1m/s	TGO reverse alarms <32
TGO Site LAeq(15min) Contribution							<32

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

### 4.3 Assessment Results - Location R4

The results of the attended noise measurements at location R4 for the May 2020 survey are summarised in **Table 4** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 4 Operator-Attended Noise Survey Results – Location R4							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	19:59	58	36	33	35	WD: N	Wind 36-58
						WS: 2m/s	Traffic 32-38
						Stab Class: E	TGO Inaudible
						TGO Site LAeq(15min) Contribution	
19/05/2020 (Night)	23:28	62	42	39	35	WD: NE	Wind 34-38
						WS: 2m/s	Traffic <34
						Stab Class: E	Birds 48-62
						TGO Site LAeq(15min) Contribution	
20/05/2020 (Evening)	20:09	55	38	32	35	WD: N	Traffic 26-55
						WS: 0.1m/s	TGO reverse alarms 28-32
						Stab Class: E	
						TGO Site LAeq(15min) Contribution	
20/05/2020 (Night)	23:30	59	39	35	35	WD: NW	Birds 36-47
						WS: 2.5m/s	Wind 34-40
						Stab Class: E	TGO reverse alarms <36
						TGO Site LAeq(15min) Contribution	
21/05/2020 (Evening)	19:25	60	37	30	35	WD: W	Traffic 28-42
						WS: 0.5m/s	Operator 48-60
						Stab Class: D	TGO Inaudible
						TGO Site LAeq(15min) Contribution	
21/05/2020 (Night)	23:24	55	34	30	35	WD: W	Traffic 28-36
						WS: 1m/s	Wind <32
						Stab Class: D	TGO Inaudible
						TGO Site LAeq(15min) Contribution	

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.4 Assessment Results - Location R5

The results of the attended noise measurements at location R5 for the May 2020 survey are summarised in **Table 5** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

**Table 5 Operator-Attended Noise Survey Results – Location R5**

Date	Time (hrs)	Descriptor (dBA re 20 $\mu$ Pa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	19:34	75	57	40	35	WD: N	Traffic 44-75
						WS: 2m/s	Wind 44-48
Stab Class: E							Offsite drill rig 44-52
							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
19/05/2020 (Night)	23:49	80	60	46	35	WD: NE	Wind <46
						WS: 2.5m/s	Offsite drill rig 46-54
Stab Class: E							Traffic 46-80
							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Evening)	19:43	79	57	39	35	WD: N	Traffic 32-79
						WS: 0.1m/s	Offsite drill rig 32-46
Stab Class: D							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Night)	23:51	82	61	37	35	WD: N	Traffic 34-78
						WS: 2m/s	Offsite drill rig 34-46
Stab Class: D							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Evening)	19:04	73	55	35	35	WD: W	Traffic 36-73
						WS: 0.5m/s	Offsite drill rig 30-42
Stab Class: D							Wind <36
							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Night)	23:45	81	58	35	35	WD: W	Wind 36-42
						WS: 1.5m/s	Offsite drill rig 36-40
Stab Class: D							Traffic 38-81
							TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.5 Assessment Results - Location R6

The results of the attended noise measurements at location R6 for the May 2020 survey are summarised in **Table 6** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 6 Operator-Attended Noise Survey Results – Location R6							
Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	20:25	58	41	38	35	WD: NE	Traffic 32-46
						WS: 2m/s	Wind 32-58
						Stab Class: E	TGO processing <34
TGO Site L <sub>Aeq</sub> (15min) Contribution							<34
19/05/2020 (Night)	23:02	53	42	39	35	WD: NE	Wind 34-46
						WS: 2.5m/s	Traffic 34-53
						Stab Class: E	TGO processing <35
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Evening)	20:34	51	35	33	35	WD: N	TGO processing 28-34
						WS: 0.5m/s	Traffic 32-51
						Stab Class: D	TGO reverse alarms 32-35
TGO Site L <sub>Aeq</sub> (15min) Contribution							35
20/05/2020 (Night)	23:04	54	40	38	35	WD: N	Traffic 36-54
						WS: 2m/s	TGO processing <36
						Stab Class: D	TGO reverse alarms 34-36
TGO Site L <sub>Aeq</sub> (15min) Contribution							35
21/05/2020 (Evening)	19:50	55	25	19	35	WD: N	Traffic 18-55
						WS: 0.1m/s	TGO Inaudible
						Stab Class: E	
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Night)	23:00	53	34	31	35	WD: W	Wind 28-34
						WS: 1m/s	Traffic 28-53
						Stab Class: E	TGO Inaudible
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

#### 4.6 Assessment Results - Location R23

The results of the attended noise measurements at location R23 for the May 2020 survey are summarised in **Table 7** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

**Table 7 Operator-Attended Noise Survey Results – Location R23**

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology <sup>1</sup>	Description and SPL, dBA
		L <sub>Amax</sub>	L <sub>Aeq</sub>	L <sub>A90</sub>			
19/05/2020 (Evening)	21:07	56	46	36	38	WD: NE	Traffic 34-56
						WS: 2m/s	Wind 33-40
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
19/05/2020 (Night)	22:21	55	45	32	36	WD: E	Traffic 31-55
						WS: 2m/s	Wind 28-36
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Evening)	21:14	55	45	36	38	WD: N	Traffic 34-55
						WS: 1.5m/s	Wind <36
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
20/05/2020 (Night)	22:22	57	44	32	36	WD: N	Traffic 34-57
						WS: 1.5m/s	Wind 32-38
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Evening)	21:05	56	39	35	38	WD: W	Traffic 36-56
						WS: 1.5m/s	Wind 34-38
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35
21/05/2020 (Night)	22:21	52	37	31	36	WD: W	Traffic 28-52
						WS: 0.5m/s	Wind 28-32
TGO Site L <sub>Aeq</sub> (15min) Contribution							<35

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.



## 5 Discussion

### 5.1 Discussion of Results - Location R2

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO remained inaudible during all measurements at location R2, hence the mining contribution remained below 35dBA. Therefore, the relevant noise limit of 35dB LAeq(15min) was satisfied. Extraneous sources such as wind in trees and traffic were audible during the survey periods.

### 5.2 Discussion of Results - Location R3/R29

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO was audible during two measurements at location R3, although the estimated mining contribution remained below 32dBA. Therefore, the relevant noise limit of 35dB LAeq(15min) was satisfied. Extraneous sources such as traffic, wind in trees, insects and dogs barking were audible during the measurements.

### 5.3 Discussion of Results - Location R4

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO was audible during two measurements at location R4. The estimated mining contribution remained below criteria, therefore the relevant noise limit of 35dB LAeq(15min) was satisfied. Extraneous sources such as wind in trees, traffic, birds, and the operator were audible during the measurements.

### 5.4 Discussion of Results - Location R5

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO was inaudible during measurements at location R5. The estimated mining contribution remained below 35dBA, and the relevant noise limit of 35dB LAeq(15min) was satisfied. Extraneous sources such as traffic, offsite drilling and wind in trees were audible during the measurements.

### 5.5 Discussion of Results - Location R6

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO was audible on four occasions at location R6. Notwithstanding, the estimated mining contribution remained below 35dBA, and the relevant noise limit of 35dB LAeq(15min) was satisfied. Extraneous sources such as traffic and wind in trees were audible during the measurements.

## 5.6 Discussion of Results - Location R23

Monitoring between Tuesday 19 May 2020 and Thursday 21 May 2020 identified that TGO was audible during one measurement at location R23. The estimated mining contribution did not exceed 34dBA, and the relevant noise limit of 36dB LAeq(15min) was satisfied. Extraneous sources such as traffic, local residential noise and wind in trees were audible during the survey periods.

## 6 Comparison of Attended and Unattended Monitoring Results

To address Condition 6 of Schedule 3 of the Project Approval, a program to calibrate and validate the real-time noise monitoring results with the attended monitoring results has been completed.

The validation compares monthly attended monitoring results against the closest assessed unattended monitoring location. Currently, TGO has an unattended real-time monitoring terminal installed at the Brooklands property (nearest to R23). **Figure 1** identifies the location of the monitor with respect to the attended monitoring locations. It is noted that the Brooklands unattended monitor is situated 600m west of the attended noise monitoring location R23, therefore, background (LA90) noise levels are significantly lower due to offset distance to highway traffic.

A comparison of mine noise contributions between attended and unattended noise monitoring demonstrates a general consistency between attended and unattended results. It was noted that birds, insects and highway traffic noise influenced measured noise levels for this assessment. Furthermore, for May 2020, results remained below the relevant criteria for both attended and unattended locations.

**Table 8** provides a summary comparison of results between the attended and unattended noise surveys for R23.

**Table 8 Comparison of Attended and Unattended Results – R23**

Assessment Type	Time (hrs)	Descriptor (dBA re 20 µPa)			Criteria	Mine Noise Contribution	Meteorology <sup>1</sup>	Description and SPL, dBA
		LA <sub>max</sub>	LA <sub>eq</sub>	LA <sub>90</sub>				
		Tuesday 19 May 2020						
Attended	21:07	56	46	36	38	<35	WD: NE WS: 2m/s Stab Class: E Traffic 34-56 Wind in trees 33-40 Local residential noise 33-38 TGO Inaudible	
Unattended	21:15	59	46	38	38	<35	Traffic TGO Inaudible	
Attended	22:21	55	45	32	36	<35	WD: E WS: 2m/s Stab Class: D Wind in trees 28-36 Traffic 31-55 TGO Inaudible	
Unattended	22:15	60	45	38	36	<35	Traffic TGO Inaudible	
Wednesday 20 May 2020								
Attended	21:14	55	45	36	38	<35	WD: N WS: 1.5m/s Stab Class: D Traffic 34-55 Wind in trees <36 TGO Inaudible	
Unattended	21:15	56	38	35	38	<35	Traffic TGO Inaudible	
Attended	22:22	57	44	32	36	<35	WD: N WS: 1.5m/s Stab Class: D Traffic 34-57 Wind in trees 32-38 TGO Inaudible	
Unattended	22:15	53	39	32	36	<35	Traffic TGO Inaudible	
Thursday 21 May 2020								
Attended	21:05	56	39	35	38	<35	WD: W WS: 1.5m/s Stab Class: E Wind in trees 34-38 TGO processing <34 TGO reverse alarms <34 Traffic 36-56	
Unattended	21:00	49	35	32	38	<35	Traffic TGO Inaudible	
Attended	22:21	52	37	31	36	<35	WD: W WS: 0.5m/s Stab Class: E Traffic 28-52 Wind in trees 28-32 TGO Inaudible	
Unattended	22:15	55	35	31	36	<35	Traffic TGO Inaudible	

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

## 7 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment on behalf of Tomingley Gold Operations (TGO). The assessment was completed to provide monthly monitoring data so that TGO can actively quantify and manage site noise emissions.

Attended monitoring conducted from Tuesday 19 May 2020 to Thursday 21 May 2020, identified that TGO mine noise was occasionally audible at four of the monitoring locations R3, R4, R6 and R23, while remained inaudible at R2 and R5 during the measurement periods. A review of monitoring data and operator attended observations determined that TGO contributions did not exceed relevant limits during applicable meteorological conditions.

*This page has been intentionally left blank*

# Appendix A - Glossary of Terms

Several technical terms have been used in this report and are explained in **Table A1**.

Table A1 Glossary of Terms	
Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured L90 statistical noise levels.
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a source, and is the equivalent continuous sound pressure level over a given period.
LAmx	The maximum root mean squared (rms) sound pressure level received at the microphone during a measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (SWL)	<p>This is a measure of the total power radiated by a source. The sound power of a source is a fundamental location of the source and is independent of the surrounding environment. Or a measure of the energy emitted from a source as sound and is given by :</p> $= 10 \cdot \log_{10} (W/W_0)$ <p>Where : W is the sound power in watts and W<sub>0</sub> is the sound reference power at 10-12 watts.</p>

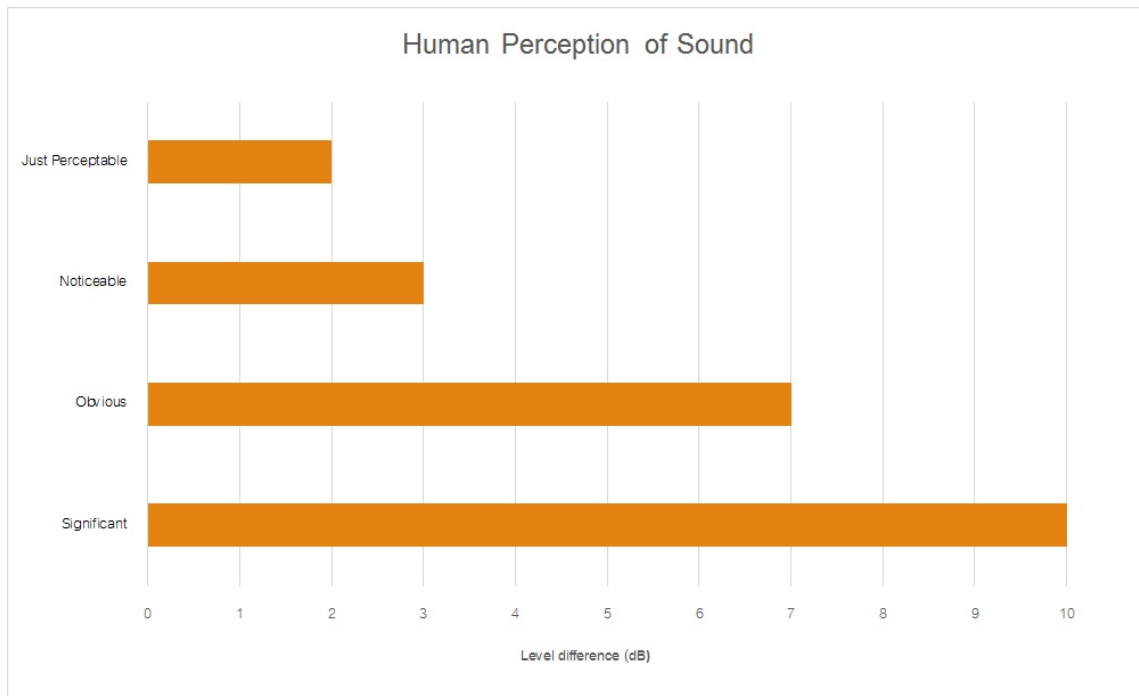


Table A2 provides a list of common noise sources and their typical sound level.

**Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA**

Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

**Figure A1 – Human Perception of Sound**



Muller Acoustic Consulting Pty Ltd  
PO Box 262, Newcastle NSW 2300  
ABN: 36 602 225 132  
P: +61 2 4920 1833  
[www.mulleracoustic.com](http://www.mulleracoustic.com)

