Monthly Noise Monitoring Assessment

Tomingley Gold Mine, February 2023

Prepared for: Tomingley Gold Operations Pty Limited
March 2023
MAC160270-2023RP02

Muller Acoustic Consulting

Document Information

Monthly Noise Monitoring Assessment

Tomingley Gold Mine, February 2023

Prepared for: Tomingley Gold Operations Pty Limited

Prepared by: Muller Acoustic Consulting Pty Ltd
PO Box 678, Kotara NSW 2289
ABN: 36 602 225 132
P: +61 2 4920 1833
www.mulleracoustic.com

Document ID	Date	Prepared By	Signed	Reviewed By	Signed
MAC160270-2023RP02	6 March 2023	Nicholas Shipman		Oliver Muller	

CONTENTS

This page has been intentionally left blank

1 Introduction

Muller Acoustic Consulting Pty Ltd (MAC) has been commissioned by Tomingley Gold Operations Pty Ltd (TGO) to complete a Noise Monitoring Assessment (NMA) for Tomingley Gold Mine (the 'mine'), Tomingley, NSW.

The NMA involved quantifying the noise contribution of the mine by direct attended measurements to determine mining noise emissions so that effective management and controls can be implemented where required. The monitoring has been conducted in accordance with the TGO Noise Management Plan and in general accordance with Conditions L4.2 to L4.7 of the EPL at six representative receiver locations. It is noted that this assessment has been completed as part of an internal noise management initiative and does not form part of the annual noise monitoring program to address conditions of the Environmental Protection License (EPL).

The assessment has been conducted in accordance with the following documents:

- NSW Environment Protection Authority (EPA), Noise Policy for Industry (NPI), 2017;
- NSW Environment Protection Authority (EPA's), Approved methods for the measurement and analysis of environmental noise in NSW, 2022;
- Environment Protection Licence EPL 20169 (EPL); and
- Australian Standard AS 1055:2018 - Acoustics - Description and measurement of environmental noise - General Procedures.

A glossary of terms, definitions and abbreviations used in this report is provided in **Appendix A**.

This page has been intentionally left blank

2 Environmental Protection License Noise Limits

Historic assessments for the mine categorise receivers into Noise Assessment Groups (NAGs). The NAGs were derived based on ambient noise data that controlled receiver RBLs.

Table 1 reproduces the operational and sleep disturbance noise limits for assessed receivers referenced from the EPL that have been adopted for this NMA and are consistent with historic EPL monitoring locations.

Table 1 Noise Limits, dBA

Noise Assessment Group	Receivers	Day	Evening	Night	
		$L_{Aeq(15min)}$	$L_{Aeq(15min)}$	$L_{Aeq(15min)}$	$L_{A1(1min)}$
NAG A	R4, R5, R6	35	35	35	45
NAG B	R2	36	35	35	45
NAG C	R3, R29	45	35	35	45
NAG D	R23	43	38	36	45

Note: Refer to figure in Appendix 4 of Project Approval 09-0155 for noise locations. However, these criteria do not apply if the Proponent has an agreement with the relevant owner(s) of these residences / land to generate higher noise levels, and the Proponent has advised the Department of Planning and Infrastructure and EPA in writing of the terms of this agreement.

This page has been intentionally left blank

3 Methodology

3.1 Locality

TGO is located to the south of the village of Tomingley, NSW. Receivers in the locality surrounding the mine are primarily rural/residential and for consistency the naming conventions for each receiver have been retained from historic noise assessments. The monitoring locations with respect to the mine are presented in the locality plan shown in **Figure 1**.

3.2 Assessment Methodology

The attended noise survey was conducted in general accordance with the procedures described in Australian Standard AS 1055:2018, "Acoustics - Description and Measurement of Environmental Noise" and the EPL. Measurements were carried out using a Svantek Type 1, 971 noise analyser between Monday 20 February 2023 and Wednesday 22 February 2023. The acoustic instrumentation used carries appropriate and current NATA (or manufacturer) calibration certificates with records of all calibrations maintained by MAC as per Approved methods for the measurement and analysis of environmental noise in NSW (EPA, 2022) and complies with AS/NZS IEC 61672.1-2019-Electroacoustics - Sound level meters - Specifications. Calibration of all instrumentation was checked prior to and following measurements. Drift in calibration did not exceed ±0.5dBA

Both evening and night measurements were of 15 minutes in duration. Where possible, throughout each survey the operator quantified the contribution of each significant noise source. Extraneous noise sources were excluded from the analysis to calculate the $LA_{eq(15min)}$ mine noise contribution for comparison against the relevant EPL limit.

Prevailing meteorological conditions for the monitoring period were sourced from TGO's meteorological station and analysed in accordance with Appendix D1 of the NPI to determine the stability category present at the time of each measured sample. This was undertaken to determine applicability of results in accordance with Condition L4.3 of the EPL. Results obtained during non-prevailing meteorological conditions (ie F Class Stability in conjunction with a 2m/s drainage or G Class Stability) are considered not applicable against the EPL criteria.

It is noted that due to constant rain during the evening period on Tuesday 21 February 2023, several measurements were unable to be completed as per Table A1, Fact Sheet A in the Noise Policy for Industry (NPI), 2017 and AS1055:2018.

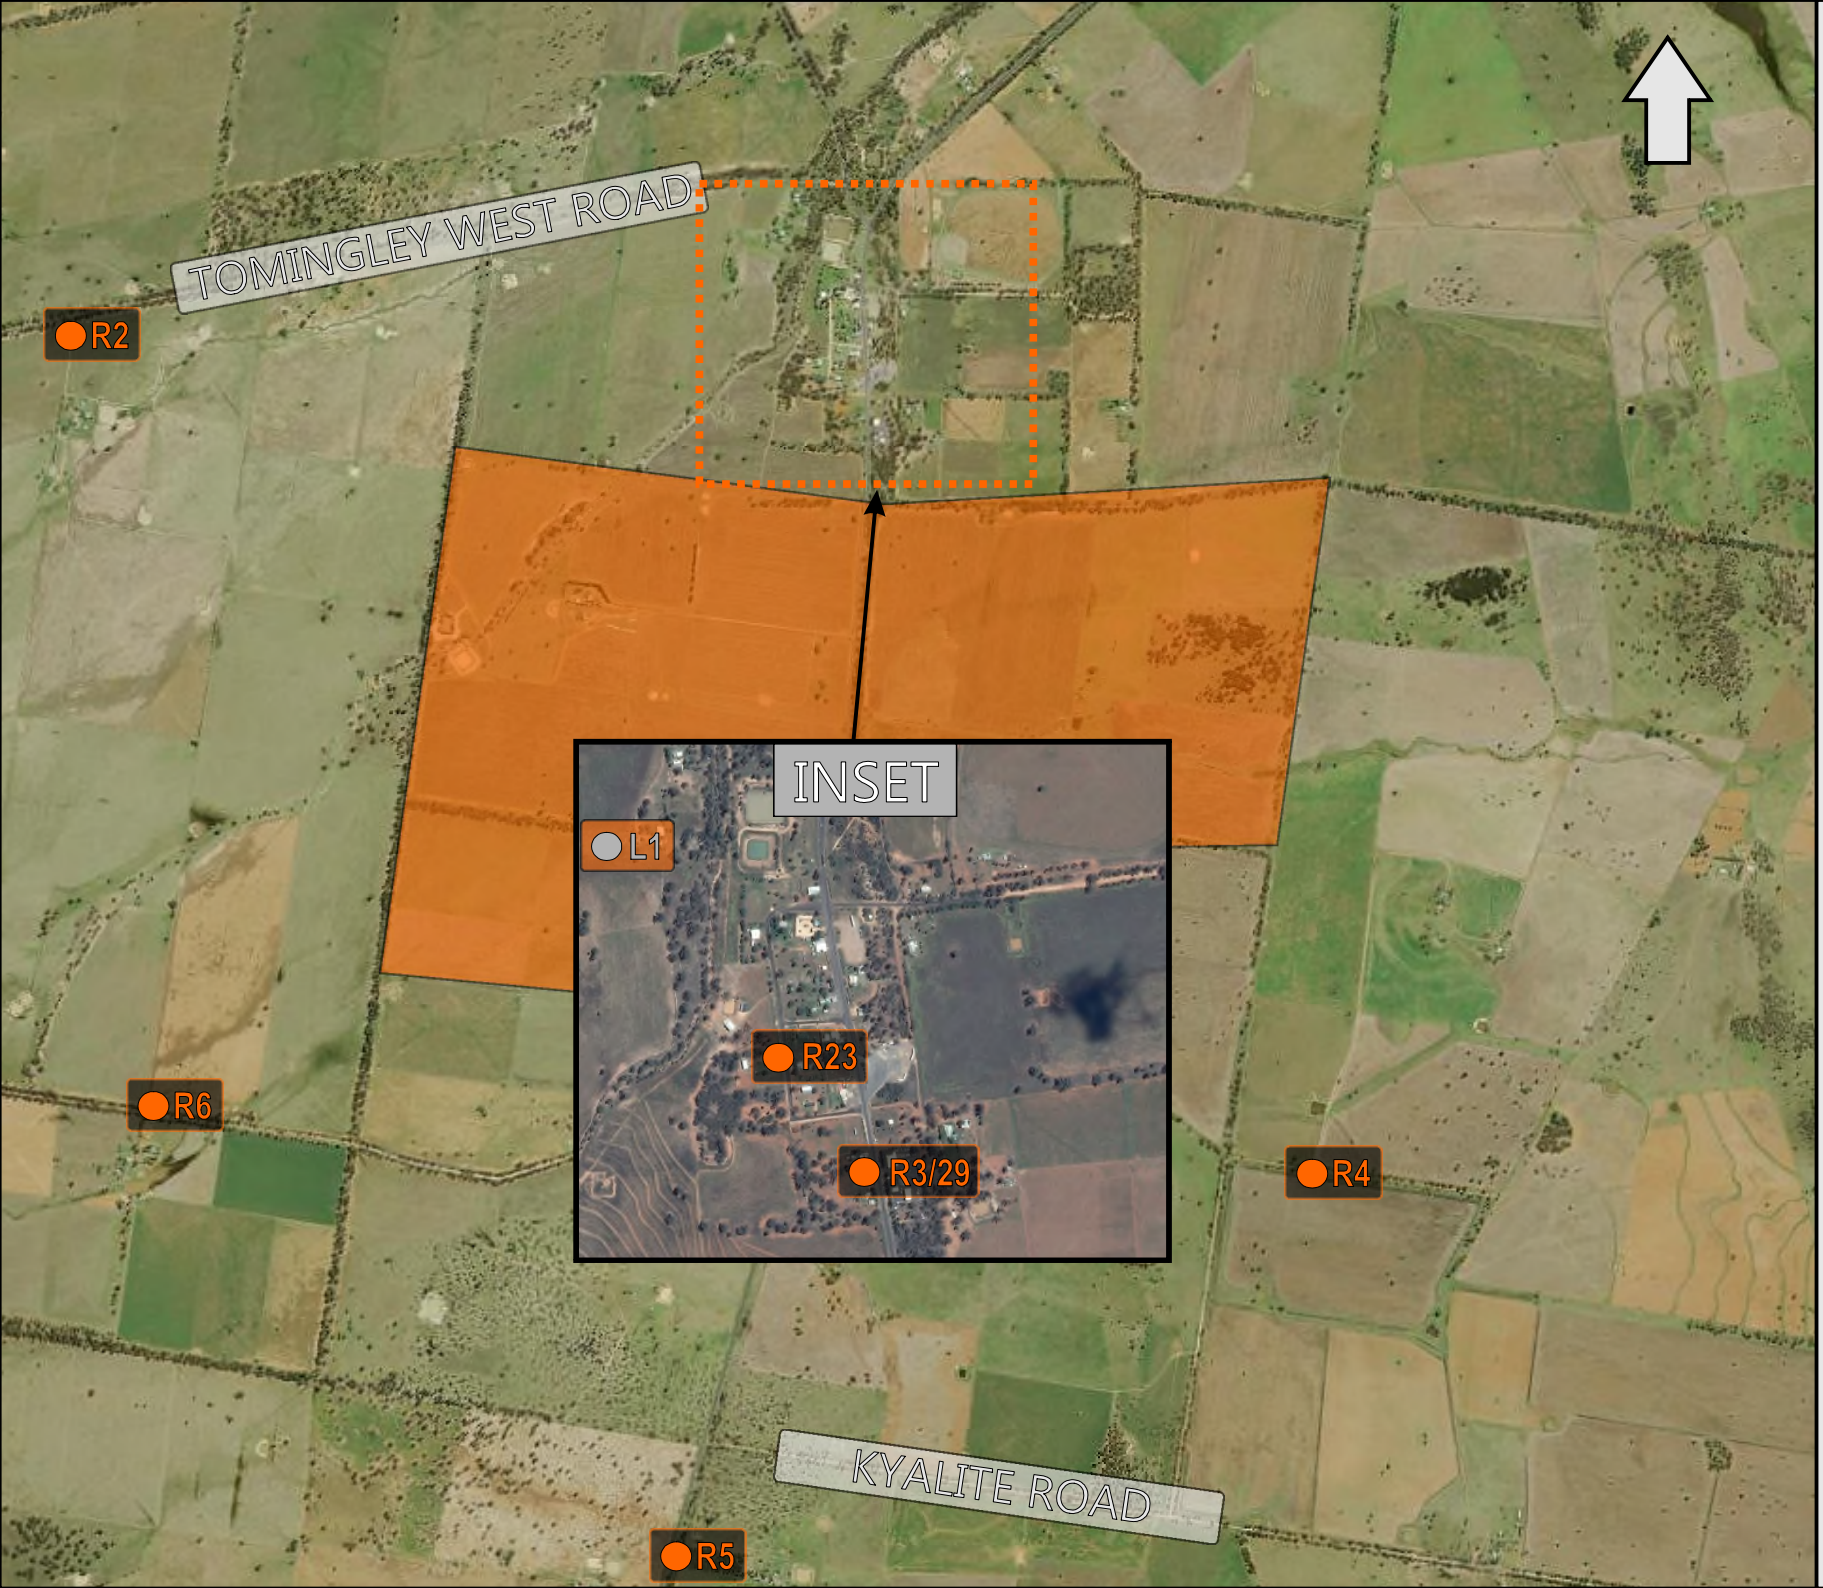

FIGURE 1

LOCALITY PLAN

REF: MAC160270

0 1000m

KEY

- L1 — UNATTENDED LOGGER LOCATION
- R2 — RECEIVER LOCATION
- SITE LOCATION

MAC
Muller Acoustic Consulting

*Imagery Source : 6MAPS

4 Results

The monitoring and assessment results are presented in individual tables for each assessment location.

4.1 Assessment Results - Location R2

The results of the attended noise measurements at location R2 for the February 2023 survey are summarised in **Table 2** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 2 Operator-Attended Noise Survey Results – Location R2

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}	Limit		
20/02/2023	21:45 (Evening)	51	39	36	35	WD: N WS: 0.4m/s Stab Class: D	Insects 34-37 Traffic 34-46 Livestock 36-51 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<26
20/02/2023	22:00 (Night)	68	43	37	35	WD: N WS: 0.4m/s Stab Class: D	Insects 33-36 Traffic 34-48 Livestock 34-68 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<27
21/02/2023	21:45 (Evening)	58	39	37	35	WD: N WS: 0.1m/s Stab Class: D	Insects 35-38 Traffic 39-50 Livestock 37-58 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<27
21/02/2023	22:01 (Night)	52	39	38	35	WD: N WS: 0.1m/s Stab Class: D	Insects 36-38 Traffic 36-48 Livestock 36-52 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<28
22/02/2023	21:45 (Evening)	52	39	38	35	WD: N WS: 0.2m/s Stab Class: D	Insects 36-52 Wind in vegetation 36-40 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<28
22/02/2023	22:00 (Night)	78	56	37	35	WD: N WS: 0.8m/s Stab Class: D	Traffic 35-78 Insects 35-42 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<27

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.2 Assessment Results - Location R3/R29

The results of the attended noise measurements at location R3/R29 for the February 2023 survey are summarised in **Table 3** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 3 Operator-Attended Noise Survey Results – Location R3/R29

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}			
20/02/2023	21:07 (Evening)	83	66	39	35	WD: N WS: 0.1m/s Stab Class: D	Traffic 37-83 Insects 37-40 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<29
20/02/2023	22:41 (Night)	82	65	40	35	WD: N WS: 0.1m/s Stab Class: D	Traffic 40-82 Insects 40-42 Aircraft 38-50 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<30
21/02/2023	20:58 (Evening)	87	66	42	35	WD: N WS: 0.1m/s Stab Class: D	Traffic 40-87 Insects <40 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<32
21/02/2023	22:44 (Night)	84	66	43	35	WD: N WS: 0.2m/s Stab Class: D	Insects 40-42 Traffic 40-84 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<33
22/02/2023	21:01 (Evening)	80	63	43	35	WD: N WS: 0.3m/s Stab Class: D	Insects 38-40 Traffic 38-80 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<33
22/02/2023	22:39 (Night)	86	67	44	35	WD: N WS: 0.6m/s Stab Class: E	Insects 41-44 Traffic 44-86 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<34

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.3 Assessment Results - Location R4

The results of the attended noise measurements at location R4 for the February 2023 survey are summarised in **Table 4** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 4 Operator-Attended Noise Survey Results – Location R4

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}			
20/02/2023	20:21 (Evening)	53	33	27	35	WD: N WS: 0.1m/s Stab Class: F	Insects 26-34 Traffic 28-44 Wind in vegetation 28-53 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<20
20/02/2023	23:28 (Night)	54	44	41	35	WD: N WS: 0.4m/s Stab Class: E	Insects 38-42 Traffic 39-44 Wind in vegetation 38-54 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<31
Due to constant rainfall during the measurement period, monitoring was unable to be completed as per Table A1, Fact Sheet A in the Noise Policy for Industry (NPI), 2017 and AS1055:2018.							
21/02/2023	23:31 (Night)	55	40	38	35	WD: N WS: 0.1m/s Stab Class: D	Insects 37-55 Traffic 37-44 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<28
22/02/2023	20:10 (Evening)	52	34	31	35	WD: N WS: 0.8m/s Stab Class: D	Insects 29-32 Birds 30-52 Wind in vegetation 30-34 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<21
22/02/2023	23:24 (Night)	60	47	41	35	WD: N WS: 2m/s Stab Class: D	Wind in vegetation 40-60 Insects <37 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<31

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.4 Assessment Results - Location R5

The results of the attended noise measurements at location R5 for the February 2023 survey are summarised in **Table 5** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 5 Operator-Attended Noise Survey Results – Location R5

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}			
20/02/2023	19:58 (Evening)	79	62	31	35	WD: N WS: 0.1m/s Stab Class: G	Traffic 27-79 Insects 27-29 Birds 28-34 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<21
20/02/2023	23:51 (Night)	79	60	34	35	WD: N WS: 0.3m/s Stab Class: D	Insects 32-36 Traffic 33-79 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<24
Due to constant rainfall during the measurement period, monitoring was unable to be completed as per Table A1, Fact Sheet A in the Noise Policy for Industry (NPI), 2017 and AS1055:2018.							
21/02/2023	23:57 (Night)	80	59	33	35	WD: N WS: 0.2m/s Stab Class: E	Insects 32-34 Traffic 34-80 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<23
22/02/2023	19:44 (Evening)	80	60	42	35	WD: N WS: 1.4m/s Stab Class: D	Wind in vegetation 38-42 Insects 38-39 Traffic 40-80 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<32
22/02/2023	23:46 (Night)	80	62	34	35	WD: N WS: 0.9m/s Stab Class: D	Insects <31 Traffic 31-80 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<24

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.5 Assessment Results - Location R6

The results of the attended noise measurements at location R6 for the February 2023 survey are summarised in **Table 6** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 6 Operator-Attended Noise Survey Results – Location R6

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}			
20/02/2023	20:45 (Evening)	53	37	33	35	WD: N WS: 0.1m/s Stab Class: E	Insects 31-34 Livestock 32-36 Traffic 33-53 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<23
20/02/2023	23:04 (Night)	58	37	35	35	WD: N WS: 0.4m/s Stab Class: D	Insects 33-36 Traffic 33-58 Livestock 33-39 TGO hum 33-36
TGO Site $L_{Aeq(15min)}$ Contribution							34
Due to constant rainfall during the measurement period, monitoring was unable to be completed as per Table A1, Fact Sheet A in the Noise Policy for Industry (NPI), 2017 and AS1055:2018.							
21/02/2023	23:06 (Night)	49	36	32	35	WD: N WS: 0.1m/s Stab Class: D	Insects 31-33 Traffic 34-49 TGO inaudible
TGO Site $L_{Aeq(15min)}$ Contribution							<22
22/02/2023	20:37 (Evening)	49	37	33	35	WD: N WS: 0.1m/s Stab Class: D	Traffic 31-49 Insects 31-34 Aircraft 34-39 TGO processing 31-36
TGO Site $L_{Aeq(15min)}$ Contribution							33
22/02/2023	23:00 (Night)	50	36	33	35	WD: N WS: 0.4m/s Stab Class: D	Insects <31 Traffic 33-50 TGO processing 31-36
TGO Site $L_{Aeq(15min)}$ Contribution							33

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

4.6 Assessment Results - Location R23

The results of the attended noise measurements at location R23 for the February 2023 survey are summarised in **Table 7** with the relevant EPL limits, the calculated mining noise contribution and prevailing meteorological conditions at the time of each measurement.

Table 7 Operator-Attended Noise Survey Results – Location R23

Date	Time (hrs)	Descriptor (dBA re 20 µPa)			EPL Limit	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}			
20/02/2023	21:24 (Evening)	53	41	35	38	WD: N WS: 0.3m/s Stab Class: E	Dog bark 33-51 Insects 33-36 Traffic 37-53 Wind in vegetation 33-39 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<25
20/02/2023	22:23 (Night)	55	44	37	36	WD: N WS: 0.6m/s Stab Class: D	Insects 33-36 Traffic 33-55 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<27
21/02/2023	21:18 (Evening)	54	44	40	38	WD: N WS: 0.1m/s Stab Class: D	Traffic 38-54 Insects 38-40 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<30
21/02/2023	22:24 (Night)	60	46	42	36	WD: N WS: 0.4m/s Stab Class: D	Insects 40-44 Traffic 40-60 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<32
22/02/2023	21:23 (Evening)	62	47	43	38	WD: N WS: 0.1m/s Stab Class: D	Insects <39 Traffic 39-62 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<33
22/02/2023	22:20 (Night)	58	48	43	36	WD: N WS: 1.2m/s Stab Class: D	Traffic 40-58 Insects <40 Wind in vegetation 44-48 TGO inaudible
		TGO Site $L_{Aeq(15min)}$ Contribution					<33

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

5 Discussion

5.1 Discussion of Results - Location R2

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities remained inaudible during the assessment period at location R2. The estimated mining contributions were measured between <26dBA and <28dBA, therefore TGO emissions remained below the relevant noise limit of 35dB $LA_{eq(15min)}$. Extraneous sources such as insects, traffic, livestock and wind in vegetation were audible during the measurement period.

5.2 Discussion of Results - Location R3/R29

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities remained inaudible during the assessment period at location R3/29. The estimated mining contributions were measured between <29dBA and <34dBA, therefore TGO emissions remained below the relevant noise limit of 35dB $LA_{eq(15min)}$. Extraneous sources such as traffic, insects and aircraft were audible during the measurement period.

5.3 Discussion of Results - Location R4

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities remained inaudible during the assessment period at location R4. The estimated mining contributions were measured between <20dBA and <31dBA, therefore TGO emissions remained below the relevant noise limit of 35dB $LA_{eq(15min)}$. Extraneous sources such as insects, traffic, wind in vegetation and birds were audible during the measurement period.

5.4 Discussion of Results - Location R5

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities remained inaudible during the assessment period at location R5. The estimated mining contributions were measured between <21dBA and <32dBA, therefore TGO emissions remained below the relevant noise limit of 35dB $LA_{eq(15min)}$. Extraneous sources such as traffic, insects, birds and wind in vegetation were audible during the measurement period.

5.5 Discussion of Results - Location R6

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities were audible on three occasions during the assessment period at location R6. The estimated mining contributions were measured between <22dBA and 34dBA, therefore the relevant noise limit of 35dB $LA_{eq(15min)}$ was satisfied. Extraneous sources such as livestock, insects, traffic, wind and birds were audible during the measurement period.

5.6 Discussion of Results - Location R23

Monitoring between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO activities remained inaudible during the assessment period at location R23. The estimated mining contributions were measured between <25dBA and <33dBA, therefore the noise limit of 38dB $LA_{eq(15min)}$ for evening and 36dB $LA_{eq(15min)}$ for night. Extraneous sources such as dogs barking, insects, traffic and wind in vegetation were audible during the measurement period.

6 Comparison of Attended and Unattended Monitoring Results

To address Condition 6 of Schedule 3 of the Project Approval, a program to calibrate and validate the real-time noise monitoring results with the attended monitoring results has been completed.

The validation compares monthly attended monitoring results against the closest assessed unattended monitoring location. Currently, TGO has an unattended real-time monitoring terminal installed at the Brooklands property (nearest to R23). Figure 1 identifies the location of the monitor with respect to the attended monitoring locations. It is noted that the Brooklands unattended monitor is situated 600m west of the attended noise monitoring location R23, therefore, background (L_{A90}) noise levels are significantly lower due to offset distance to highway traffic.

Historically, a comparison of mine noise contributions between attended and unattended noise monitoring demonstrates a general consistency between attended and unattended results. It was noted that wind, insects, birds, and highway traffic noise influenced measured noise levels for this assessment. Furthermore, for February 2023, results remained below the relevant criteria for attended locations.

It is noted that due to technical difficulties the unattended monitor was not operational due to a mains power electrical fault, although the issue has since been resolved.

Table 8 provides a summary comparison of results between the attended and unattended noise surveys for R23.

Table 8 Comparison of Attended and Unattended Results

Assessment Type	Time (hrs)	Descriptor (dBA re 20 µPa)			Criteria	Mine Noise Contribution	Meteorology[1]	Description and SPL, dBA
		L_{Amax}	L_{Aeq}	L_{A90}				
Monday 20 February 2023								
Attended	21:24	53	41	35	38	<25	WD: N WS: 0.3m/s Stab Class: E	Dog bark 33-51 Insects 33-36 Traffic 37-53 Wind in vegetation 33-39 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	38	N/A		N/A
Attended	22:23	55	44	37	36	<27	WD: N WS: 0.6m/s Stab Class: D	Insects 33-36 Traffic 33-55 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	36	N/A		N/A
Tuesday 21 February 2023								
Attended	21:18	54	44	40	38	<30	WD: N WS: 0.1m/s Stab Class: D	Traffic 38-54 Insects 38-40 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	38	N/A		N/A
Attended	22:24	60	46	42	36	<32	WD: N WS: 0.4m/s Stab Class: D	Insects 40-44 Traffic 40-60 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	36	N/A		N/A
Wednesday 22 February 2023								
Attended	21:23	62	47	43	38	<33	WD: N WS: 0.1m/s Stab Class: D	Insects <39 Traffic 39-62 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	38	N/A		N/A
Attended	22:20	58	48	43	36	<33	WD: N WS: 1.2m/s Stab Class: D	Traffic 40-58 Insects <40 Wind in vegetation 44-48 TGO inaudible
Unattended	N/A	N/A	N/A	N/A	36	N/A		N/A

Note 1: Meteorological data obtained from TGO's on-site weather station or by direct measurement by the operator.

7 Conclusion

Muller Acoustic Consulting Pty Ltd (MAC) has completed a Noise Monitoring Assessment on behalf of Tomingley Gold Operations (TGO). The assessment was completed to provide monthly monitoring data so that TGO can actively quantify and manage site noise emissions.

Attended monitoring conducted between Monday 20 February 2023 and Wednesday 22 February 2023 identified that TGO mine noise was audible on several occasions during the measurement period. A review of monitoring data and operator attended observations determined that TGO contributions remained below relevant limits during applicable meteorological conditions.

This page has been intentionally left blank

Appendix A - Glossary of Terms

Several technical terms have been used in this report and are explained in **Table A1**.

Table A1 Glossary of Terms

Term	Description
1/3 Octave	Single octave bands divided into three parts
Octave	A division of the frequency range into bands, the upper frequency limit of each band being twice the lower frequency limit.
ABL	Assessment Background Level (ABL) is defined in the NPI as a single figure background level for each assessment period (day, evening and night). It is the tenth percentile of the measured L90 statistical noise levels.
Ambient Noise	The noise associated with a given environment. Typically a composite of sounds from many sources located both near and far where no particular sound is dominant.
A Weighting	A standard weighting of the audible frequencies designed to reflect the response of the human ear to noise.
dBA	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
dB(Z)	Decibels Linear or decibels Z-weighted.
Hertz (Hz)	The measure of frequency of sound wave oscillations per second - 1 oscillation per second equals 1 hertz.
LA10	A noise level which is exceeded 10 % of the time. It is approximately equivalent to the average of maximum noise levels.
LA90	Commonly referred to as the background noise, this is the level exceeded 90 % of the time.
LAeq	The summation of noise over a selected period of time. It is the energy average noise from a source, and is the equivalent continuous sound pressure level over a given period.
LAmax	The maximum root mean squared (rms) sound pressure level received at the microphone during a measuring interval.
RBL	The Rating Background Level (RBL) is an overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used to determine the intrusiveness criteria for noise assessment purposes and is the median of the ABL's.
Sound power level (SWL)	This is a measure of the total power radiated by a source. The sound power of a source is a fundamental location of the source and is independent of the surrounding environment. Or a measure of the energy emitted from a source as sound and is given by : = 10.log10 (W/Wo) Where : W is the sound power in watts and Wo is the sound reference power at 10-12 watts.

Table A2 provides a list of common noise sources and their typical sound level.

Table A2 Common Noise Sources and Their Typical Sound Pressure Levels (SPL), dBA

Source	Typical Sound Level
Threshold of pain	140
Jet engine	130
Hydraulic hammer	120
Chainsaw	110
Industrial workshop	100
Lawn-mower (operator position)	90
Heavy traffic (footpath)	80
Elevated speech	70
Typical conversation	60
Ambient suburban environment	40
Ambient rural environment	30
Bedroom (night with windows closed)	20
Threshold of hearing	0

Figure A1 – Human Perception of Sound

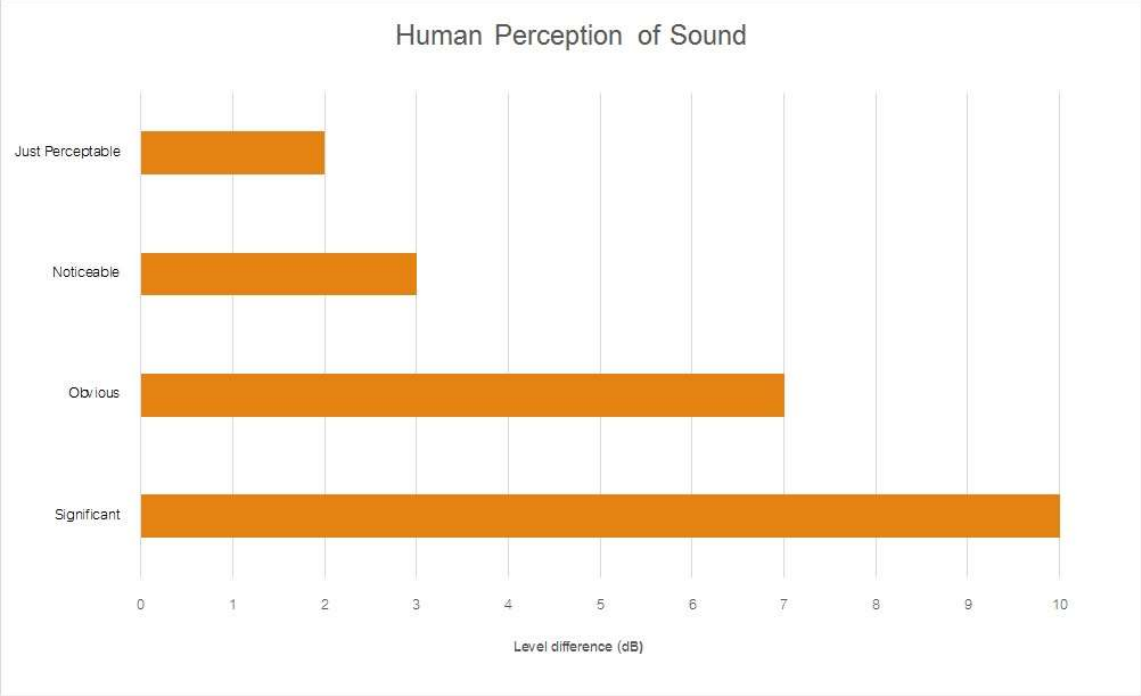

Muller Acoustic Consulting Pty Ltd
PO Box 678, Kotara NSW 2289
ABN: 36 602 225 132
Ph: +61 2 4920 1833
www.mulleracoustic.com

MAC
Muller Acoustic Consulting